

# PURITRON



Trusted Point-of-Service

## 15" ULV POS

### NEW Releasing !


>>15" Intel852GM AIO POS Terminal

>>Built in Intel ULV-1GHz CPU

>>Most competitive in its kind

■ AT-150C

2nd Display

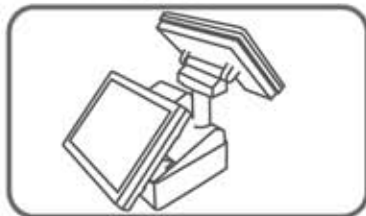

Design in printer space



Cable Management



## Specification

AT-150C



### System

Motherboard Type	Intel
Form Factor	Mini-ITX
System Chipset	Intel 852GM+ICH4
CPU Supporting	Intel ULV 1GHz(non L2 Cache)
CPU FSB	400MHz
DIMM Socket	One 200-PIN SO-DIMM DDR266 up to 1GB Default 512MB
Graphic	Integrated Intel 852GM GMCH
Audio	Realtek AC'97 Codec
LAN Controller	Dual 10/100 Base-T Realtek 8100C Ethernet
I/O Connector	RJ-45 x2 Serial port x3 & Parallel Port x1 USB port x6 VGA port x1 PS/2 Mini DIN keyboard port & mouse port Audio Line-in/out and Mic-in Jacks

### Mechanical

Touch	Default Taiwan 5wire resistive touch or ELO by option
Device	3.5" IDE HDD x 1 (Support Ultra DMA-66/100), default 40GB
Power Supply	200W ATX power supply
Bezel	Plastic black color front bezel
Dimension	280x220x280mm W x D x H
Optinal Ordering	1. 1~3 track MSR      2. Customer Display 3. Thermal Receipt Printer    4. 2nd Display 12-inch

### Display

Size	15" TFT LCD
Contrast Ratio	450 : 1
Brightness	250cd/m <sup>2</sup>
Resolution	1024x768

Puritron Technology Inc.

TEL: +886-2-2914-7298

FAX: +886-2-2915-6795

E-mail : info@puritron.com.tw

Website : www.puritron.com.tw